



### Technical data

|  |                  |   |
|--|------------------|---|
| Operation  |                  | Road / stand-by                         |
| Refrigerant  |                  | R404A                                   |
| Gas charge   | <b>Kg</b>        | 3,8                                     |
| Cooling capacity                                   | <b>30 Ta °C*</b> | 0° <b>8.800 W</b> 0° <b>5.450 W</b>     |
|  |                  | -20° <b>5.000 W</b> -20° <b>2.900 W</b> |
| Tension  | <b>stand-by</b>  | 400/3N~/50                              |
|  | <b>road</b>      | 12Vdc                                   |
| Max absorption                                     | <b>Amp.</b>      | 9,73                                    |
|  | <b>kW</b>        | 4,07                                    |
| Defrost  |                  | Hot Gas                                 |
| Net weight unit - Version = <b>Road / Stand-by</b> | <b>Kg</b>        | 460                                     |
| Net weight unit - Version = <b>Road</b>            | <b>Kg</b>        | 425                                     |
| Stand-by compressor                                | <b>mc/h</b>      | 11,8                                    |
| Road compressor                                    | <b>cc</b>        | 235                                     |
| Evap air flow                                      | <b>m³/h</b>      | 4.500                                   |
| Air throw  | <b>m</b>         | 7                                       |

### OPTIONAL

- Tropical version (only for models un0°80 and un0°100)
- 90 ltrs fuel tank
- Copper pipes (according to customer request)
- Battery
- Door switches
- Heating option with hot water in diesel mode and electrical heaters for electric stand-by
- Temperature recorder




### Standard supply:

- 1) Mounting KIT (including, battery casing, fixing bolts, canals and sealings)
- 2) Electrical connection KIT (2 plug, 1 socket, 10 mt. of cable)
- 3) Fuel pump KIT (including Fuel pump, bracket, fittings and 10 mt. of fuel hoses)
- 4) Auto phase correction
- 5) Hot gas defrost and heating by 3 way valve reverse cycle
- 6) Manual override
- 7) Sight glass and moisture indicator

### Recommended truck box volume

| Tc °C | 0   |     | -20 |     |
|-------|-----|-----|-----|-----|
| Ta °C | +30 | +40 | +30 | +40 |
| m³    | 60  | 42  | 53  | 33  |

### acking mass and dimensions

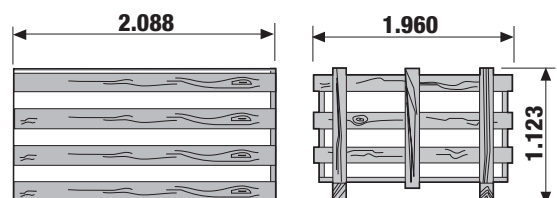

Mass = Kg 155 / Volume = m³ 4,596